

pewag winner profilift lifting points


Lifting and lashing



PLBW pewag winner profilift beta

360° rotatable lifting point. The load ring is 180° movable and can be positioned at any required angle due to its replaceable and patented spring. Likewise interchangeable is the hexagon-special screw of grade 10.9 material, which is secured against loss. The screw is 100% crack-tested as well as covered with a chromate VI-free protection against corrosion, and marked with WLL and thread size. It can be tightened with a hexagon wrench or spanner wrench.

The lifting points pewag winner profilift beta are marked with an individual serial number, that allows product traceability and load capacity for the most inappropriate field of operation, which explains the increased WLL in the upright loaded position. In permissible fields of operations the lifting point corresponds to a 5-fold safety. pewag winner profilift beta is available with metric or UNC-thread, whereas the lifting points with metric thread are also obtainable with customized thread lengths. The table with the different load capacities depending on the method of lifting as lifting gear, number of legs and angle of inclination is a part of the user manual and packed together with each lifting point.

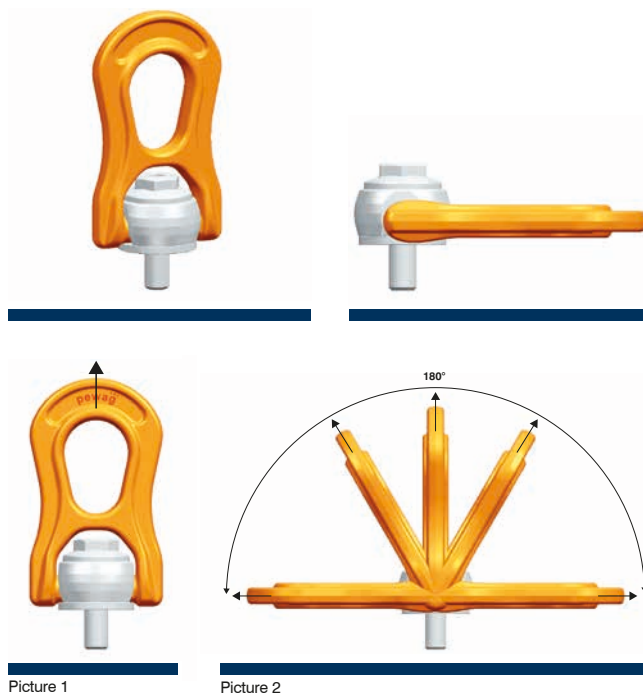

Method of lifting										
Number of legs	1	1	2	2	2	2	3+4	3+4	2	3+4
Angle of inclination	0°	90°	0°	90°	0°-45°	45°-60°	0°-45°	45°-60°	asymm.	asymm.

Code	Thread [mm]	Fastening torque [Nm]	Load capacity [kg]									
PLBW 0,3 t	M8	6	500	300	1.000	600	400	300	600	450	300	300
PLBW 0,6 t	M10	10	1.000	600	2.000	1.200	800	600	1.300	900	600	600
PLBW 1 t	M12	15	1.300	1.000	2.600	2.000	1.400	1.000	2.100	1.500	1.000	1.000
PLBW 1,3 t	M14	30	2.000	1.300	4.000	2.600	1.800	1.300	2.700	1.900	1.300	1.300
PLBW 1,6 t	M16	50	2.500	1.600	5.000	3.200	2.200	1.600	3.400	2.400	1.600	1.600
PLBW 2 t	M18	70	3.000	2.000	6.000	4.000	2.800	2.000	4.200	3.000	2.000	2.000
PLBW 2,5 t	M20	100	3.500	2.500	7.000	5.000	3.500	2.500	5.300	3.700	2.500	2.500
PLBW 3 t	M22	120	4.500	3.000	9.000	6.000	4.200	3.000	6.300	4.500	3.000	3.000
PLBW 4 t	M24	160	5.500	4.000	11.000	8.000	5.600	4.000	8.400	6.000	4.000	4.000
PLBW 5 t	M27	200	6.500	5.000	13.000	10.000	7.000	5.000	10.500	7.500	5.000	5.000
PLBW 6,3 t	M30	250	7.000	6.300	14.000	12.600	8.800	6.300	13.200	9.400	6.300	6.300
PLBW 8 t	M33	270	9.000	8.000	18.000	16.000	11.000	8.000	16.500	12.000	8.000	8.000
PLBW 10 t	M36	320	11.000	10.000	22.000	20.000	14.000	10.000	21.000	15.000	10.000	10.000
PLBW 12,5 t	M42	400	13.500	12.500	27.000	25.000	17.500	12.500	26.300	18.700	12.500	12.500
PLBW 15 t	M48	600	16.000	15.000	32.000	30.000	21.000	15.000	32.000	22.500	15.000	15.000

Code	Thread [inch]	Fastening torque [lb/ft]	Load capacity [lbs]									
PLBW U5/16	5/16"-18	4,5	1.100	660	2.200	1.320	900	660	1.400	900	660	660
PLBW U 3/8	3/8"-16	7,5	2.200	1.300	4.400	2.600	1.800	1.300	2.700	1.900	1.300	1.300
PLBW U 7/16	7/16"-14	11	2.800	2.200	5.600	4.400	3.000	2.200	4.600	3.300	2.200	2.200
PLBW U 9/16	9/16"-12	22	4.400	3.000	8.800	6.000	4.200	3.000	6.300	4.500	3.000	3.000
PLBW U 5/8	5/8"-11	37	5.500	3.500	11.000	7.000	4.900	3.500	7.300	5.200	3.500	3.500
PLBW U 3/4	3/4"-10	74	6.600	5.500	13.200	11.000	7.700	5.500	11.500	8.200	5.500	5.500
PLBW U 7/8	7/8"-9	118	12.000	8.800	24.000	17.600	12.300	8.800	18.500	13.200	8.800	8.800
PLBW U1	1"-8	148	13.000	11.000	26.000	22.000	15.400	11.000	23.000	16.500	11.000	11.000
PLBW U1 1/8	1 1/8"-7	185	14.300	13.500	28.600	27.000	18.900	13.500	28.300	20.200	13.500	13.500
PLBW U1 1/4	1 1/4"-7	200	19.800	17.500	39.600	35.000	24.500	17.500	36.700	26.200	17.500	17.500
PLBW U1 3/8	1 3/8"-6	236	24.000	22.000	48.000	44.000	30.800	22.000	46.200	33.000	22.000	22.000
PLBW U1 1/2	1 1/2"-6	295	25.000	24.000	50.000	48.000	33.600	24.000	50.400	36.000	24.000	24.000

Safety factor 5

Attention: Subject to technical changes!

Permissible usage


Load capacity acc. to the inspection certificate respectively table of WLL in the mentioned directions of pull (see picture 1 and 2).

Non permissible usage


Make sure when choosing the assembly that improper load can not arise e.g. if:

- The direction of pull is obstructed
- Direction of pull is not in the foreseen area (see picture 3)
- Loading ring rests against edges or load (picture 4)

The load ring must be placed in the direction of pull before loading – do not turn under load. For more details please have a look into our user manual.



Picture 3





Picture 4

To calculate the necessary thread length (L):

$L = H + S + K + X$

- H = Material height
- S = Thickness of the washer
- K = Height of the nut (depending on the thread size of the screw)
- X = Excess length of the screw (twofold pitch of the screw)
- L max. = n max.

pewag provides, along with the standard and maximum thread lengths, specially customised thread lengths. Supplied customised and maximum thread lengths include a washer and a crack-tested, corrosion-protected screw nut.

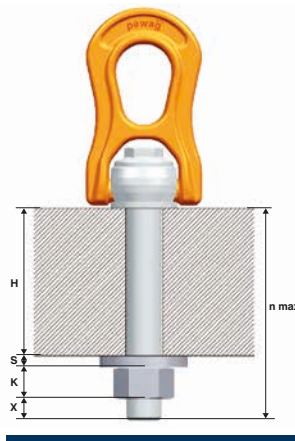

Code	Thread [mm]	Load capacity [kg]	a [mm]	b [mm]	c [mm]	e [mm]	f [mm]	g [mm]	h [mm]	n [mm]	n max. [mm]	Hex [mm]	Eye [mm]	Weight [kg/pc.]
PLBW 0,3 t	M8	300	29	56	30	38	18	27	94	13	80	8	15	0,32
PLBW 0,6 t	M10	600	29	56	30	38	18	27	94	15	100	8	15	0,33
PLBW 1 t	M12	1.000	29	56	30	38	18	27	94	17	180	8	15	0,34
PLBW 1,3 t	M14	1.300	43	79	45	55	25	38	138	22	220	10	24	1,03
PLBW 1,6 t	M16	1.600	43	79	45	55	25	38	138	24	260	10	24	1,04
PLBW 2 t	M18	2.000	43	79	45	55	25	38	138	27	295	10	24	1,07
PLBW 2,5 t	M20	2.500	43	79	45	55	25	38	138	30	335	10	24	1,08
PLBW 3 t	M22	3.000	64	118	68	85	38	58	209	33	355	14	36	3,50
PLBW 4 t	M24	4.000	64	118	68	85	38	58	209	36	355	14	36	3,53
PLBW 5 t	M27	5.000	64	118	68	85	38	58	209	40	355	14	36	3,58
PLBW 6,3 t	M30	6.300	64	118	68	85	38	58	209	45	355	14	36	3,66
PLBW 8 t	M33	8.000	106	188	108	132	60	91	331	54	328	19	55	14,50
PLBW 10 t	M36	10.000	106	188	108	132	60	91	331	59	328	19	55	14,60
PLBW 12,5 t	M42	12.500	106	188	108	132	60	91	331	69	328	19	55	14,90
PLBW 15 t	M48	15.000	106	188	108	132	60	91	331	74	328	19	55	15,20

Code	Thread [inch]	Load capacity [lbs]	a [inch]	b [inch]	c [inch]	e [inch]	f [inch]	g [inch]	h [inch]	n [inch]	n max. [inch]	Hex [inch]	Eye [inch]	Weight [lbs/pc.]
PLBW U5/16	5/16"-18	660	1,14	2,20	1,18	1,50	0,71	1,06	3,70	0,51	-	5/16"	5/8"	0,71
PLBW U3/8	3/8"-16	1.300	1,14	2,20	1,18	1,50	0,71	1,06	3,70	0,59	-	5/16"	5/8"	0,73
PLBW U7/16	7/16"-14	2.200	1,14	2,20	1,18	1,50	0,71	1,06	3,70	0,67	-	5/16"	5/8"	0,75
PLBW U9/16	9/16"-12	3.000	1,69	3,11	1,77	2,17	0,98	1,50	5,43	0,87	-	5/16"	1"	2,27
PLBW U5/8	5/8"-11	3.500	1,69	3,11	1,77	2,17	0,98	1,50	5,43	0,95	-	5/16"	1"	2,29
PLBW U3/4	3/4"-10	5.500	1,69	3,11	1,77	2,17	0,98	1,50	5,43	1,19	-	5/16"	1"	2,38
PLBW U7/8	7/8"-9	8.800	2,52	4,65	2,68	3,35	1,50	2,28	8,23	1,44	-	9/16"	1 3/8"	7,78
PLBW U1	1"-8	11.000	2,52	4,65	2,68	3,35	1,50	2,28	8,23	1,59	-	9/16"	1 3/8"	7,89
PLBW U1 1/8	1 1/8"-7	13.500	2,52	4,65	2,68	3,35	1,50	2,28	8,23	1,79	-	9/16"	1 3/8"	8,07
PLBW U1 1/4	1 1/4"-7	17.500	4,17	7,40	4,25	5,20	2,36	3,58	13,03	2,13	-	3/4"	2 3/16"	32,00
PLBW U1 3/8	1 3/8"-6	22.000	4,17	7,40	4,25	5,20	2,36	3,58	13,03	2,32	-	3/4"	2 3/16"	32,20
PLBW U1 1/2	1 1/2"-6	24.000	4,17	7,40	4,25	5,20	2,36	3,58	13,03	2,72	-	3/4"	2 3/16"	32,80

Attention: Subject to technical changes!