

ZHV[®] INOX

Stainless steel hand chain block for loads from 500 to 1,000 kg



► Technical characteristics

- > ZHV totally stainless steel : body, hooks, lifting and hand chain chain.
- > Machined chain sprocket and gears provide smoother, more efficient operation.
- > 3 meters standard lift. Hand chain is 0.5 meters less than lift chain. Other length on request.
- > ZHV's compact design offers safety together with reduced weight. Ideal for construction and maintenance applications.
- > Stainless steel casing solidly protects chain sprocket, gearcase and handwheel cover.
- > Upper and lower hook ISO Stainless steel hooks with safety latch.
- > CE certificate.
- > Surface Treatment : Electrolytic Polishing.





► Options

- > CHV INOX trolley normal headroom (HPN).
- > Load limiter.

► Material list

- > Hand chain : SUS316.
- > Load chain : SUS316L.
- > Hook part and Sheave : SUS304.
- > Pin and Bush : SUS420J2.
- > Covers and Plates : SUS304.
- > Name Plate : SUS316.

ZHV[®]
500 kg

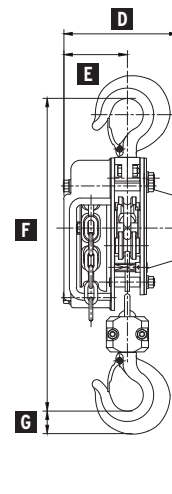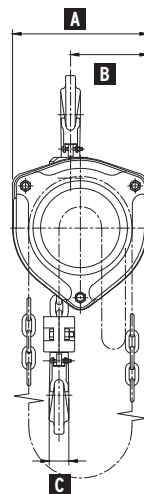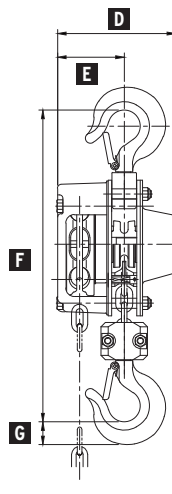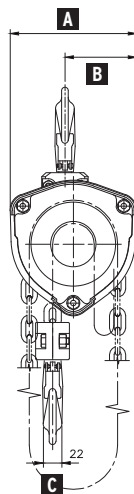

ZHV[®]
1000 kg

Load (kg)	Dimensions in mm							Height of lift std (m)	Hand chain length (m)	Lifting chain size (mm)	Num. of falls	Effort to place on chain to lift the load (kg)	Weight (kg)
	A	B	C	D	E	F	G						
500	150	85	22	143	81	330	25	2,5	2,0	Ø 6,3 x P 19,0	1	33	12,1
1000	193	110,5	28	165,8	91,8	400	32	2,5	2,0	Ø 7,9 x P 23,0	1	35	19,7